



Specifications

Size: 1/4"
Bodies: PVC
Seats: EPDM
Seals: EPDM
Models: Male Thread x Male Thread
 Male Thread x Hose (ID 3/8")
 Male Thread x Female Thread
 Hose x Hose / Male Thread x Hose
 Female Thread x Female Thread
 Male Thread x Elbow (OD .63")

Sizes 1/4" PVC/EPDM Models
NSF-61 Certified

Standard Features (Size 1/4")


- Pressure rated at 150psi at 120° F (water)
- Precise fingertip control
- Calibrated flow indicator
- Rugged unibody construction, sturdy stem
- Full vacuum rated, 29.9" Hg
- 90 degree turn operation with lever handle
- Cv = 1.6

Sample Specification

All Labcock® valves shall be of compact, unibody construction having a lever handle, calibrated flow indicator and male threads, female threads, hose ends or elbow as part of the valves' integral construction. Valves shall be constructed of PVC conforming to ASTM D1784 Cell Classification 12454A. All O-rings shall be EPDM. Labcock® valves are rated to 150psi at 70° F, as manufactured by Asahi/America, Inc.

Parts List (Size 1/4")

PARTS			
NO.	DESCRIPTION	PCS.	MATERIAL
1	Body	1	PVC
2	Ball and Stem	1	PVC
3	End Connector	2	PVC
4	Gland	1	PVC
5	Seat	2	EPDM, Others
6	O-Ring	1	EPDM, Others
7	Handle	1	ABS

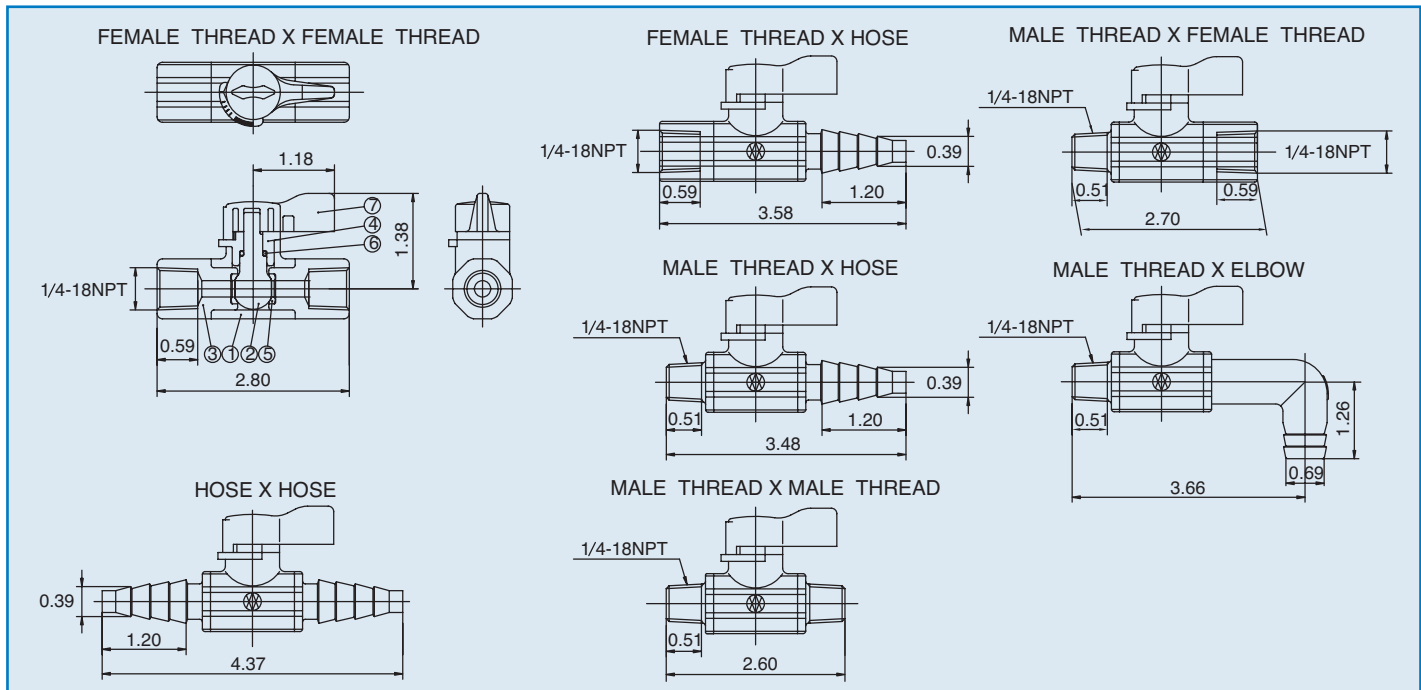

Fusion is an Australian stockist for Asahi/America / Asahi Yukizai Valves. For more information about Asahi Valves in Australia contact us today.

1300 94 1004
fusionaus.com